




KONGERIKET NORGE
The Kingdom of Norway



Bekreftelse på patentsøknad nr
Certification of patent application no

▽
20034731

▷ Det bekreftes herved at vedheftede dokument er nøyaktig utskrift/kopi av ovennevnte søknad, som opprinnelig inngitt 2003.10.22

▷ It is hereby certified that the annexed document is a true copy of the above-mentioned application, as originally filed on 2003.10.22

2004.10.27

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Ellen B. Olsen
Saksbehandler



PATENTSTYRET®
Styret for det industrielle rettsvern

Øknad om patent

www.patentstyret.no



dig utfylt skjema sendes til adressen nedenfor. Vennligst ikke heft sammen sidene.
 er om at blankettene utfylles *maskinelt* eller ved bruk av *blokkbokstaver*. Skjema for
 illing på datamaskin kan lastes ned fra **www.patentstyret.no**.

Alm. tilgj. 23 APR 2005

Søker Den som søker om patent blir også innehaver av en eventuell rettighet. Må fylles ut!

Foretakets navn (fornavn hvis søker er person):

Etternavn (hvis søker er person):

Norsk Hydro ASA

☐ Kryss av hvis søker tidligere har vært kunde hos Patentstyret.

Oppgi gjerne kundennummer:

Adresse:

Postnummer:
0240

Poststed:
Oslo

Land:
Norge

☐ Kryss av hvis flere søkere er angitt i medfølgende skjema eller på eget ark.

☐ Kryss av hvis søker(ne) utfører mindre enn 20 årsverk (se veiledning).

☐ Kryss av hvis det er vedlagt erklæring om at patentsøker(ne) innehar retten til oppfinnelsen.

Kontaktinfo Hvem skal Patentstyret henvende seg til? Oppgi telefonnummer og eventuell referanse.

Fornavn til kontaktperson for fullmektig eller søker:

Etternavn:

Svein

Hofseth

Telefon:

2 2 5 3 2 9 0 3

Referanse (maks. 30 tegn):

P03032

Evt. adresse til kontaktperson:

Norsk Hydro ASA

Postnummer:
0240

Poststed:
Oslo

Land:
Norge

Fullmektig Hvis du ikke har oppnevnt en fullmektig, kan du gå til neste punkt.

Foretakets navn (fornavn hvis fullmektig er person):

Etternavn (hvis fullmektig er person):

Svein

Hofseth

☒ Kryss av hvis fullmektig tidligere har vært kunde hos Patentstyret.

Oppgi gjerne kundennummer:

Adresse:

Norsk Hydro ASA

Postnummer:
0240

Poststed:
Oslo

Land:
Norge

Oppfinner Oppfinneren skal alltid oppgis, selv om oppfinner og søker er samme person.

Oppfinnerens fornavn:

Etternavn:

Oddvin

Reiso

☐ Kryss av hvis oppfinner tidligere har vært kunde hos Patentstyret.

Oppgi gjerne kundennummer:

Adresse:

Hoelsandvegen 42

Postnummer:
6600

Poststed:
Sunddalsøra

Land:
Norge

☒ Kryss av hvis flere oppfinnere er angitt i medfølgende skjema eller på eget ark.

ADRESSE
 Postboks 8160 Dep.
 Københavngaten 10
 0033 Oslo

TELEFON
 22 38 73 00
 TELEFAKS
 22 38 73 01

BANKGIRO
 8276.01.00192
 ORGANISASJONSNR.
 971526157 MVA



PATENTSTYRET
 Styret for det industrielle rettsvern

SKJEMA

ETTER SØKER

ETTER FULLMEKTIG

OPPFINDER

OPPFINNING



Tittel: Fyll bare ut hvis denne søknaden er en videreføring av en tidligere innlevert internasjonal søknad (PCT).

Tittel:
Aluminiumslegering

PCT: Fyll bare ut hvis denne søknaden er en videreføring av en tidligere innlevert internasjonal søknad (PCT).

Inngivelsesdato (åååå.mm.dd):

Søknadsnummer:

PCT-søknadens dato og nummer:

PCT

/

Prioritetskrav: Hvis du ikke har søkt om denne oppfinnelsen tidligere (i et annet land eller i Norge) kan du gå videre til neste punkt.

Prioritet kreves på grunnlag av tidligere innlevert søknad i Norge eller utlandet.

Inngivelsesdato (åååå.mm.dd):

Landkode:

Søknadsnummer:

Opplysninger om tidligere søknad: Ved flere krav skal tidligste prioritet angis her.

☐ Flere prioritetskrav er angitt i medfølgende skjema, eller på eget ark.

Mikroorganisme: Fyll bare ut hvis oppfinnelsen omfatter en mikroorganisme.

Søknaden omfatter en kultur av mikroorganisme. Deponeringssted og nummer må oppgis:
Deponeringssted og nummer (benytt gjerne eget ark):☐ Prøve av kulturen skal bare utleveres til en særlig sakkyndig.

Avdelt/utskilt: Hvis du ikke har søkt om patent i Norge tidligere, kan du gå videre til neste punkt.

Søknaden er avdelt eller utskilt fra tidligere levert søknad i Norge:

☐ Avdelt søknad

Dato (åååå.mm.dd):

Søknadsnummer:

☐ Utskilt søknad

Informasjon om opprinnelig søknad/innsendt tilleggsmateriale

Annet:

☐ Søknaden er også levert per telefaks.

Oppgi dato (åååå.mm.dd):

☐ Jeg har bedt om forundersøkelse.

Oppgi nr (årstall - nummer - bokstav):

Vedlegg: Angi hvilken dokumentasjon av oppfinnelsen du legger ved, samt andre vedlegg.

☒ Eventuelle tegninger i to eksemplarer

Oppgi antall tegninger:

5

☒ Beskrivelse av oppfinnelsen i to eksemplarer☒ Patentkrav i to eksemplarer☒ Fullmaktsdokument(er)☒ Sammendrag på norsk i to eksemplarer☐ Overdragelsesdokument(er)☐ Dokumentasjon av eventuelle prioritetskrav (prioritetsbevis)☒ Erklæring om retten til oppfinnelsen☐ Oversettelse av internasjonal søknad i to eksemplarer (kun hvis PCT-felt over er fylt ut)

Dato/underskrift: Sjekk at du har fylt ut punktene under «Søker», «Oppfinner» og «Vedlegg». Signer søknaden.

Sted og dato (blokkbokstaver):

Oslo, 22.10.2003

Navn i blokkbokstaver:

Svein Hofseth

Signatur:

NB! Søknadsavgiften vil bli fakturert for alle søknader (dvs. at søknadsavgiften ikke skal følge søknaden).
Betalingsfrist er ca. 1 måned, se faktura.PATENTSTYRET®
Styret for det industrielle rettsvern

1d

PATENTSTYRET

Applicant : Norsk Hydro ASA
N-0240 OSLO

03-10-22*20034731

Attorney : Svein Hofseth
Norsk Hydro ASA
N-0240 OSLO

Inventor(s) : Oddvin Reiso
Hoelsandvegen 42
6600 Sunndalsøra

Jostein Røyset
Øranvegen 55
6600 Sunndalsøra

Jan Anders Sæter
Åkersøra 42
6600 Sunndalsøra

Ulf Tundal
Fagerhaugvegen 15
6600 Sunndalsøra

Gunnar Gjertsen
Slåttåvegen 16
4262 Avaldsnes

Title : "High speed aluminium alloy"

P03032

5

10

15 The present invention relates to aluminium alloy containing Mg and Si, and which in particular is useful for extrusion purposes at high speed.
The alloy contains manganese, Mn as an important alloying element.

20 In what may be regarded as the closest prior art, WO 98/42884 it is stated that Mn has a technical effect when included in AlMgSi alloys at levels above 0.02 wt% preferably at least 0.03 wt%. At Si levels of about 0.50 wt% or greater the stability of the β -AlFeSi is increased during homogenisation, and the transformation of the AlFeSi intermetallic from β to α is retarded. A low transformation degree of the AlFeSi intermetallic phases are claimed to give reduced extrudability and poor surface finish. The mechanism when
25 adding Mn at levels above 0.02 wt% is that the stability of the β -AlFeSi phase is reduced. Mn additions will thus promote transformation of the AlFeSi intermetallic from β to α , reduce the sizes and increase the spherodization of the intermetallics. The following minimum content of Mn as a function of the Si content is proposed:

30
$$\text{Wt\% manganese} = \text{at least } 0.3 \times \text{wt\% silicon} - 0.12$$

In AlMgSi alloys Mg_2Si particles will melt together with the surrounding matrix if the temperature of the material exceeds the eutectic temperature of $\text{Mg}_2\text{Si} + \text{Al}$ (ss). If this happens during extrusion, it will cause tearing in the profile and/or negatively affect the
35 surface quality of the extruded profile. Therefore, it is of outmost importance to avoid large Mg_2Si particles that are present when the material reach the die opening and may give rise to such melting reactions during extrusion.

With the present invention it is found that the Mn has an additional positive effect on the extrudability of an AlMgSi alloy. In addition to promoting the transformation of the AlFeSi intermetallic phases, AlMnFeSi dispersoid particles are formed during homogenisation.

- 5 These particles are acting as nucleation sites for Mg₂Si particles during cooling after homogenisation. In a high quality billet the Mg₂Si particles formed during cooling after homogenisation should easily dissolve during the preheating and the extrusion operation before the material reach the die opening. With a larger number of dispersoid particles a higher number of Mg₂Si particles are formed, resulting in a reduced size of each particle.
- 10 Since the rate of dissolution of an Mg₂Si particle is proportional to its size, a high quality billet should contain a certain amount of AlMnFeSi dispersoid particles, which promote the formation of a relatively large number of small Mg₂Si particles that dissolve easily during the preheating and extrusion operation.

- 15 The alloy according to the invention is characterized in t h a t it contains in wt%:

Mg	0,3 - 0,5
Si	0,35 - 0,6
Mn	0,02 - 0,08
Cr	0,05
20 Zn	0,15
Cu	0,1
Fe	0,14 - 0,28 and

in addition grain refining elements up to 0,1 wt% and incidental impurities up to 0,15, as defined in the attached claim 1.

- 25 Dependent claims 2 – 4 define preferred embodiments of the invention.

The invention will be further described in the following by way of examples and with reference to the drawings in which:

- 30 Fig. 1 shows, based on tests, the dispersoid density in two 6060 types of alloys with constant Mg and Si and Fe contents versus the Mn content of the alloys,

- Fig. 2 shows the extrusion ram speed versus billet temperature for the two alloys with different Mn contents where dark triangles represent profiles with tearing and open triangles represent good profiles (without tearing),
- 35

Fig. 3 shows the extrusion ram speed versus billet temperature for eight alloys with different Mn contents where dark triangles represent profiles with tearing and open triangles represent good profiles,

Fig. 4 shows the degree of transformation of β -AlFeSi to α -AlFeSi in alloy variants J0 - J7 related to Fig. 3.

Fig. 5 shows a schematic diagram of max. extrusion speed as a function of billet temperature and tearing mechanism. Billet temperature for the transition of mechanism, T^* , is indicated for a low and a high Mn-level..

The number of dispersoid particles that are formed depends on the Mn content in the alloy. In Fig. 1 the number density of dispersoid particles in as-homogenised 6060 type of alloys with constant Mg and Si and Fe contents are plotted against the Mn content of the alloys. The densities are not true average numbers densities, but represent number densities in areas with the highest number of dispersoid particles. However, the numbers should represent relative differences between the investigated alloys.

The effect of the Mn content and thus the number of dispersoid particles on the maximum extrusion speed is further, based on tests, demonstrated in Figure 2. Two alloys of type 6060, the measured compositions of which are given in Table 1 below, essentially with constant Mg, Si and Fe contents and two different Mn contents are plotted against the billet temperature. Dark triangles represent profiles with tearing and open triangles represent good profiles. In Figure 2a) where the Mn content is 0.03 wt% the maximum extrusion speed at temperatures around 445°C is significantly higher than in Figure 2b) where the Mn content is 0.006 wt%.

Table 1 Measured composition of alloy 1 and alloy 2

Alloy	% Si	% Fe	% Cu	% Mn	% Mg	% Cr	% Zn	% Ti	% Na
1	0,41	0,18	0,002	0,028	0,46	0,004	0,010	0,009	0,0003
2	0,44	0,19	0,002	0,006	0,46	0,002	0,014	0,014	0,0002

Both alloys were cooled at a rate of 400°C/hour after homogenisation. The higher number of dispersoid particles in alloy 1 with the highest Mn content, results in smaller Mg_2Si particles than in alloy 2. At the lowest preheating temperature, approximately 445°C, the Mg_2Si particles in alloy 2 do not dissolve and tearing of the profile is observed at ram speeds of 12 mm/sec or higher. In alloy 1 with smaller particle sizes, the Mg_2Si particles at least partially dissolve and tearing of the profile does not occur until the ram speed

reaches 14.5 mm/sec. With an even higher Mn content, which would have resulted in smaller Mg_2Si particles, the maximum extrusion speed would probably have been more than 18 mm/sec.

- 5 At the highest preheating temperature the alloy variant with the highest Mn content show a slightly better extrudability than the alloy variant with low Mn. The degrees of transformation of β -AlFeSi to α -AlFeSi are 94% for alloy 1 with 0.03 wt% Mn and 54% for alloy 2 with 0.006 wt% Mn.

10

The results of a further test is shown In Figure 3. In this case alloys of a 6060 type, the measured compositions of which are given in table 2 below, with essentially constant Mg, Si and Fe contents and variable Mn contents were cooled from the homogenisation
15 temperature at a rate of 400 °C/hour.

Table 1 Measured composition of alloys J0 through J7.

Alloy	% Si	%Fe	%Cu	%Mn	%Mg	%Cr	%Zn	%Ti	%Na
J0	0.46	0.23	0.002	0.003	0.38	0.002	0.007	0.023	0.0002
J1	0.47	0.23	0.002	0.008	0.38	0.001	0.007	0.014	0.0002
J2	0.46	0.21	0.007	0.021	0.37	0.001	0.007	0.015	0.0003
J3	0.47	0.22	0.002	0.034	0.40	0.001	0.006	0.013	0.0004
J4	0.47	0.23	0.002	0.053	0.40	0.001	0.006	0.016	0.0004
J5	0.45	0.22	0.007	0.076	0.36	0.001	0.005	0.018	0.0003
J6	0.45	0.22	0.008	0.105	0.36	0.001	0.005	0.019	0.0002
J7	0.45	0.22	0.008	0.156	0.36	0.001	0.004	0.015	0.0007

- 20 At the lowest preheating temperature the two variants, J6 and J7, with the highest Mn contents show a better extrudability than the other variants with lower Mn contents. Again, the explanation is the same: the higher number of dispersoid particles in these two variants results in smaller Mg_2Si particles that dissolves or partially dissolves, resulting in higher extrusion speeds before tearing of the profile is observed.

- 25 At the two highest preheating temperatures there are only small differences in maximum extrusion speeds between the alloys. The degrees of transformation of β -AlFeSi to α -AlFeSi are shown for alloy variants J0 to J7 in Figure 4. Even though the degree of transformation is lower than the recommended 80% (in the previously mentioned WO 98/42884 reference) for the variants J0 and J1, they actually show the highest
30 maximum extrusion speed of all the alloy variants at the two highest preheating temperatures.

In both examples shown above, there are only small differences in maximum extrusion speed between alloys with high and low Mn contents at high preheating temperatures. The reason for this is that the Mg_2Si particles have dissolved for all alloys at these high
 5 billet temperatures, and not only in the alloys with the smallest particle sizes (i.e. highest Mn content). At higher billet temperatures the mechanism that is causing tearing is melting of the Al (ss) together with AlFeSi intermetallic phases (this temperature is very close to the solidus temperature of the alloy). At lower billet temperatures melting of Mg_2Si particles together with Al (ss) cause tearing, which occurs at a lower billet exit temperature
 10 and therefore at a lower speed. It is well known that the maximum extrusion speed increases with lower billet temperatures as long as the mechanism that causes tearing does not change. Adding Mn leads to a higher number density but smaller mean size of the Mg_2Si particles, whereby it is possible to maintain the tearing mechanism which is melting of the Al (ss) together with AlFeSi intermetallic phases down to lower preheating
 15 temperatures. Because melting of Mg_2Si particles is avoided at low preheating temperatures in alloys with small Mg_2Si particles, it is possible to take advantage of the low billet temperature and thus increase the extrusion speed.

Fig. 5 shows a schematic diagram where the maximum extrusion speed is limited by the
 20 melting temperature of Al (ss) + AlFeSi intermetallic particles (~solidus temperature) at high billet temperatures, and by melting of Mg_2Si + Al (ss) (eutectic temperature) at low billet temperatures. The temperature where the transition between the two mechanisms occurs, T^* , is depending on the sizes of the Mg_2Si particles in the material. For small Mg_2Si particle sizes the transition temperature occurs at low temperatures and is shifted
 25 towards higher billet temperatures with increasing Mg_2Si particle sizes.

The Mg_2Si particle sizes depend on factors like Mg and Si content of the alloy, cooling rate after homogenisation and the nucleation conditions for Mg_2Si particles. Mg and Si are
 30 added to give the necessary strength of the material in the final ageing treatment of the extruded profiles and are therefore difficult to change. The cooling rate after homogenisation is more or less given by the cooling equipment and the diameter of the billets, and an increase of the cooling rate would require major investments in the cast house. As demonstrated above it is possible to alter the nucleation conditions for Mg_2Si
 35 particles by adding small amounts of Mn to the alloy.

In order to obtain the effects described above, Mn contents of approximately 0.03 or above would be necessary. The exact amount of Mn will depend on the Mg and Si contents in the alloy, and the cooling rate after homogenisation. At too high Mn contents the AlMgSi alloys become quench sensitive. Since the AlMnFeSi dispersoid particles act as nucleation sites for Mg₂Si particles, a slow cooling rate after extrusion will allow a large amount of Mg₂Si particles to grow during cooling after extrusion. The large Mg₂Si particles will not contribute to increasing the strength of the material, but rather drain the material for Mg and Si that should have been used in the age hardening process for nucleating a large amount of Mg-Si hardening precipitates. As a result, too high Mn contents in the alloy will give lower strength in the extruded profiles.

Another aspect of the quench sensitivity problem, i.e. excessive formation of (Mg,Si) particles on the AlMnFeSi dispersoid particles during cooling after extrusion, is the effect of the (Mg, Si) particle distribution on the surface appearance on anodised profiles. In order to maintain a consistent surface appearance on anodised profiles it is necessary to impose an upper limit on the Mn content of the alloy.

The two examples shown above have demonstrated that higher numbers of AlMnFeSi dispersoid particles have a positive effect on the maximum extrusion speed of AlMgSi alloys. Since the positive effect of Mn on extrudability is a result of the effect of the dispersoid particles on the nucleation and growth of Mg₂Si particles, Mn has a positive effect on all AlMgSi alloys and not only on alloys with Si contents above approximately 0.50 wt% (ref. WO 98/42884). In the two examples the alloys are of type AA6060, but the positive effect is to be expected also for alloys within AA6063, AA6005 as well as for alloys with lower Mg contents than AA6060.



Claims

- 5 1. Aluminium alloy containing Mg and Si, in particular useful for extrusion purposes,
characterised in that it contains in wt%:
- | | |
|-------|-----------------|
| Mg | 0,3 - 0,5 |
| Si | 0,35 - 0,6 |
| Mn | 0,02 - 0,08 |
| Cr | 0,05 |
| 10 Zn | 0,15 |
| Cu | 0,1 |
| Fe | 0,08 - 0,28 and |
- in addition grain refining elements up to 0,1 wt% and
15 incidental impurities up to 0,15.
2. Alloy according to claim 1,
characterised in that
the content of Mn preferably is between 0,03 – 0,06.
- 20 3. Alloy according to claim 1,
characterised in that
the content of Fe is between 0,18 – 0,25 wt%.
- 25 4. Alloy according to claim 1,
characterised in that
that the temperature prior to extrusion is between 430 – 510 °C



Abstract

Aluminium alloy containing Mg and Si, in particular useful for extrusion purposes containing in wt%:

	Mg	0,3 - 0,5
5	Si	0,35 - 0,6
	Mn	0,02 - 0,08
	Cr	0,05
	Zn	0,15
	Cu	0,1
10	Fe	0,14 - 0,28 and
in addition grain refining elements up to 0,1 wt% and		
incidental impurities up to 0,15 wt%.		

The manganese (Mn), within the specified limits, has an additional positive effect on the extrudability of an AlMgSi alloy. In addition to promoting the transformation of the AlFeSi intermetallic phases, AlMnFeSi dispersoid particles are formed during homogenisation. These particles are acting as nucleation sites for Mg_2Si particles during cooling after homogenisation. In a high quality billet the Mg_2Si particles formed during cooling after homogenisation should easily dissolve during the preheating and the extrusion operation before the material reach the die opening.






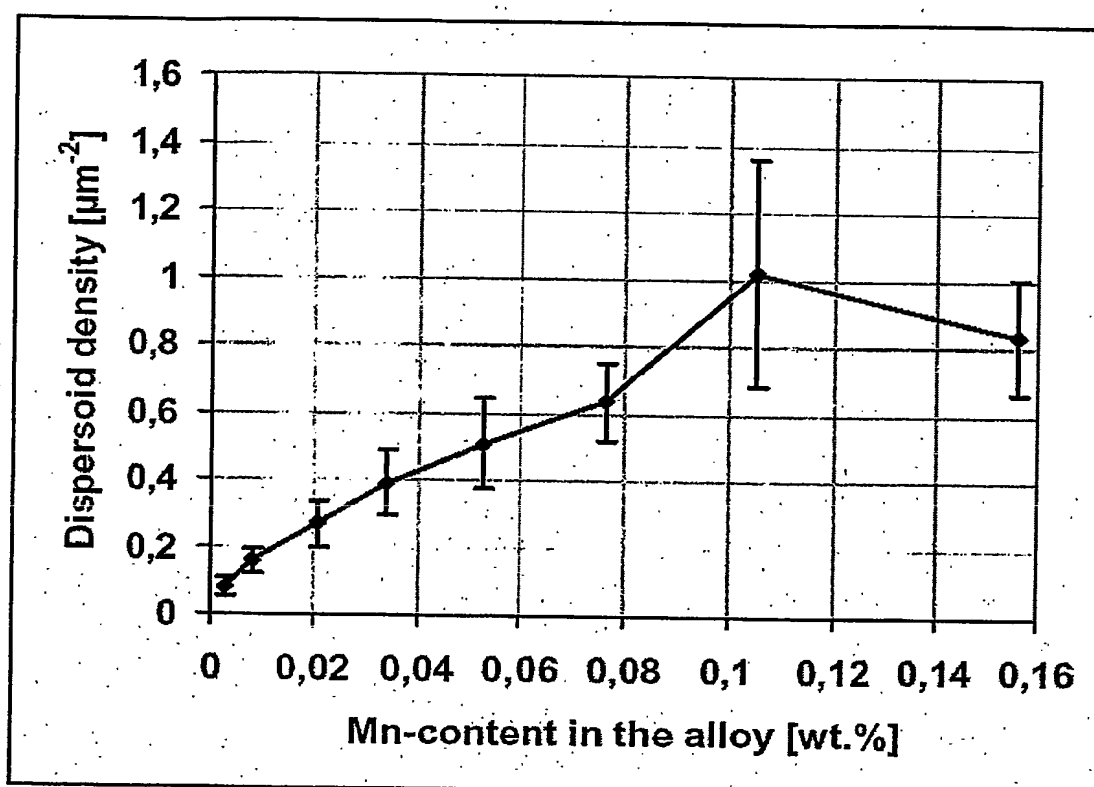


Figure 1: Dispersoid density in 6060 types of alloys with constant Mg and Si and Fe contents versus the Mn content of the alloys.



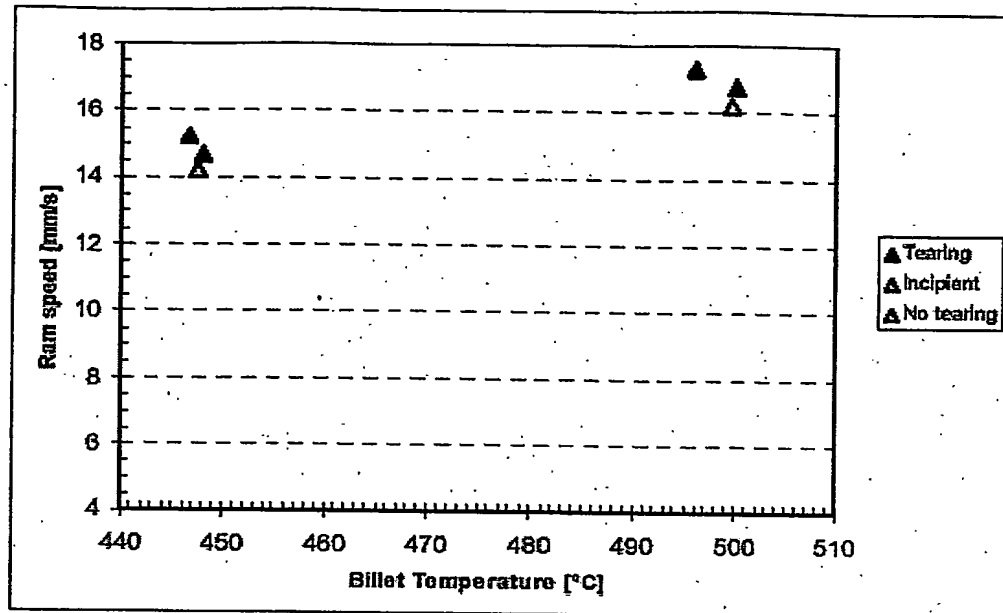


a) Alloy 1: 0.03wt% Mn

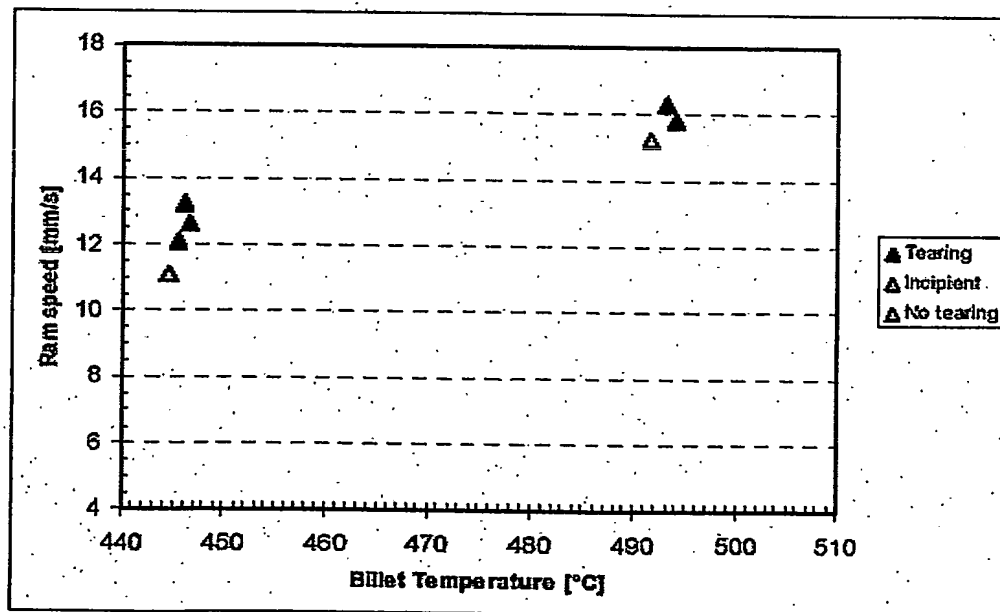

b) Alloy 2: 0.006 wt% Mn

Figure 2: Extrusion ram speed versus billet temperature for two alloys with different Mn contents. Dark triangles represent profiles with tearing and open triangles represent good profiles.



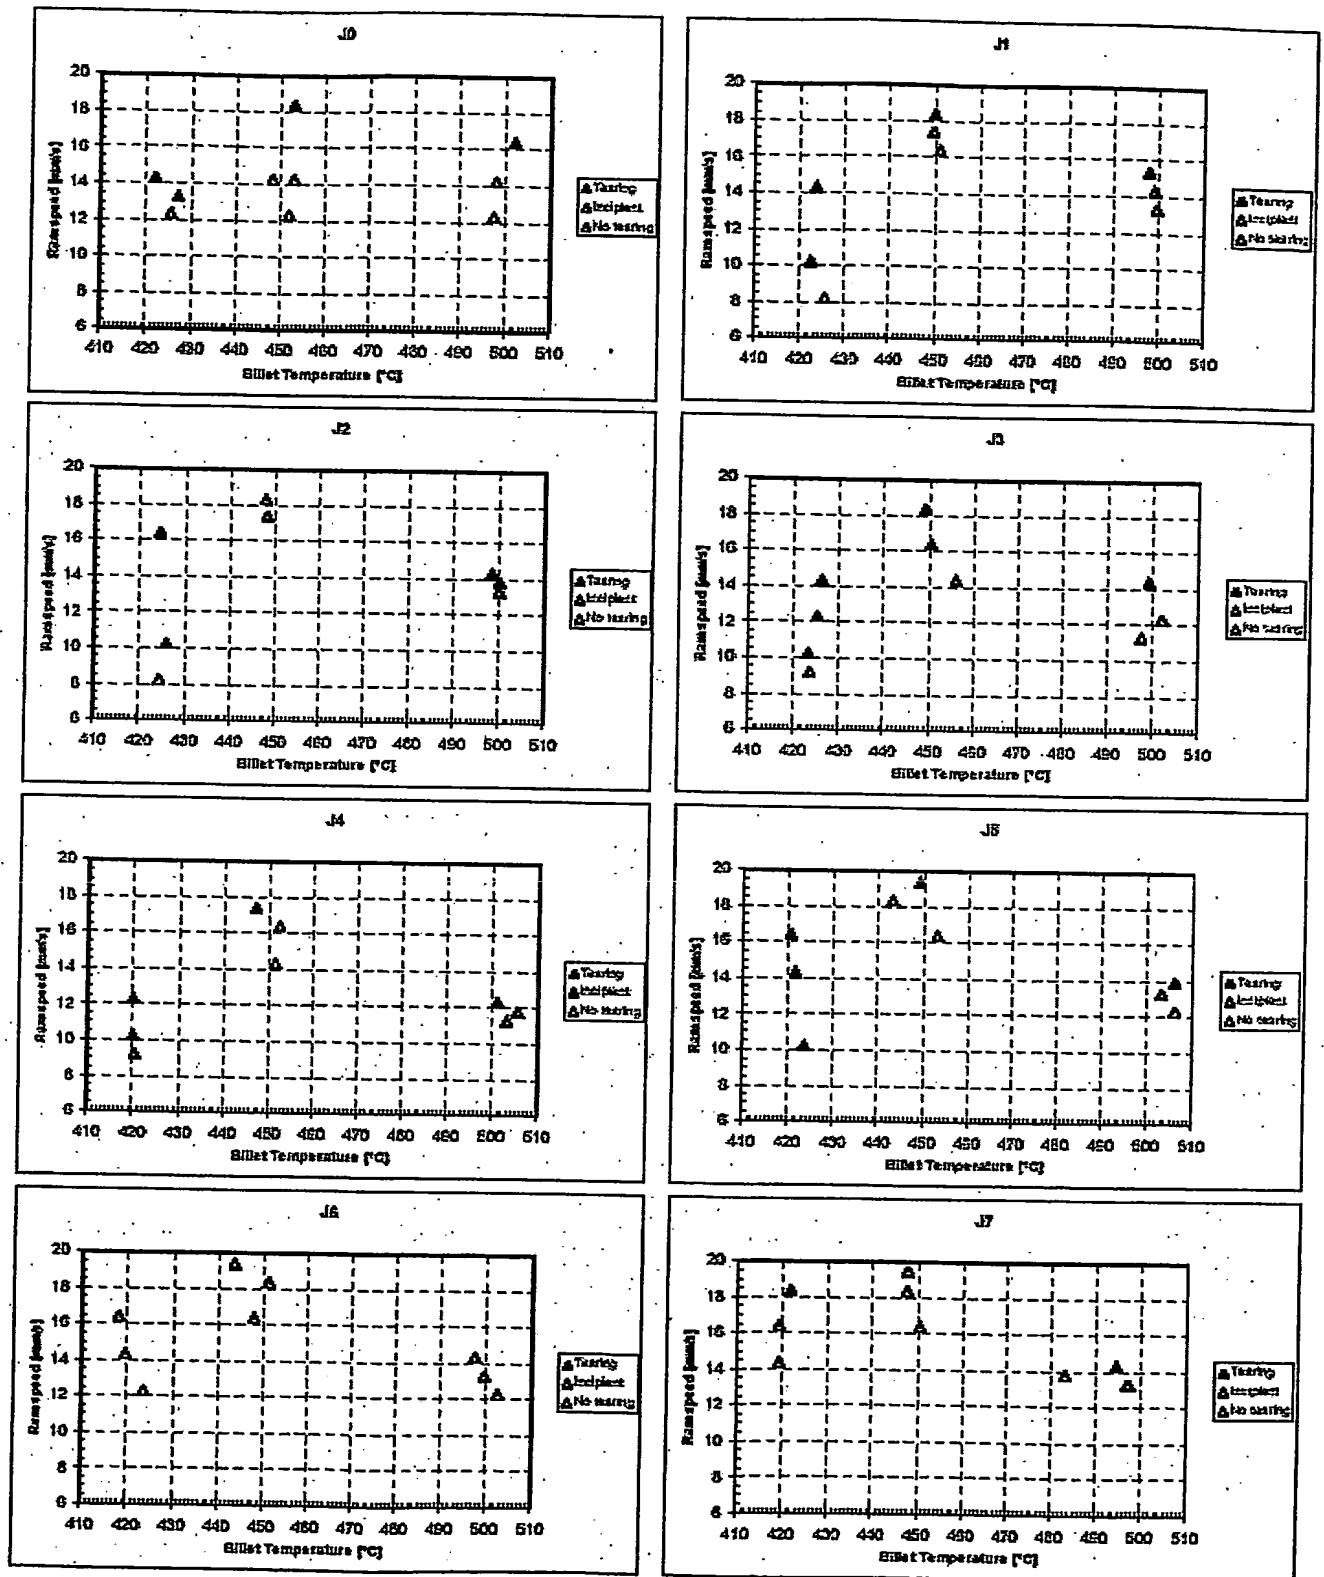


Figure 3: Extrusion ram speed versus billet temperature for eight alloys with different Mn contents. Dark triangles represent profiles with tearing and open triangles represent good profiles.



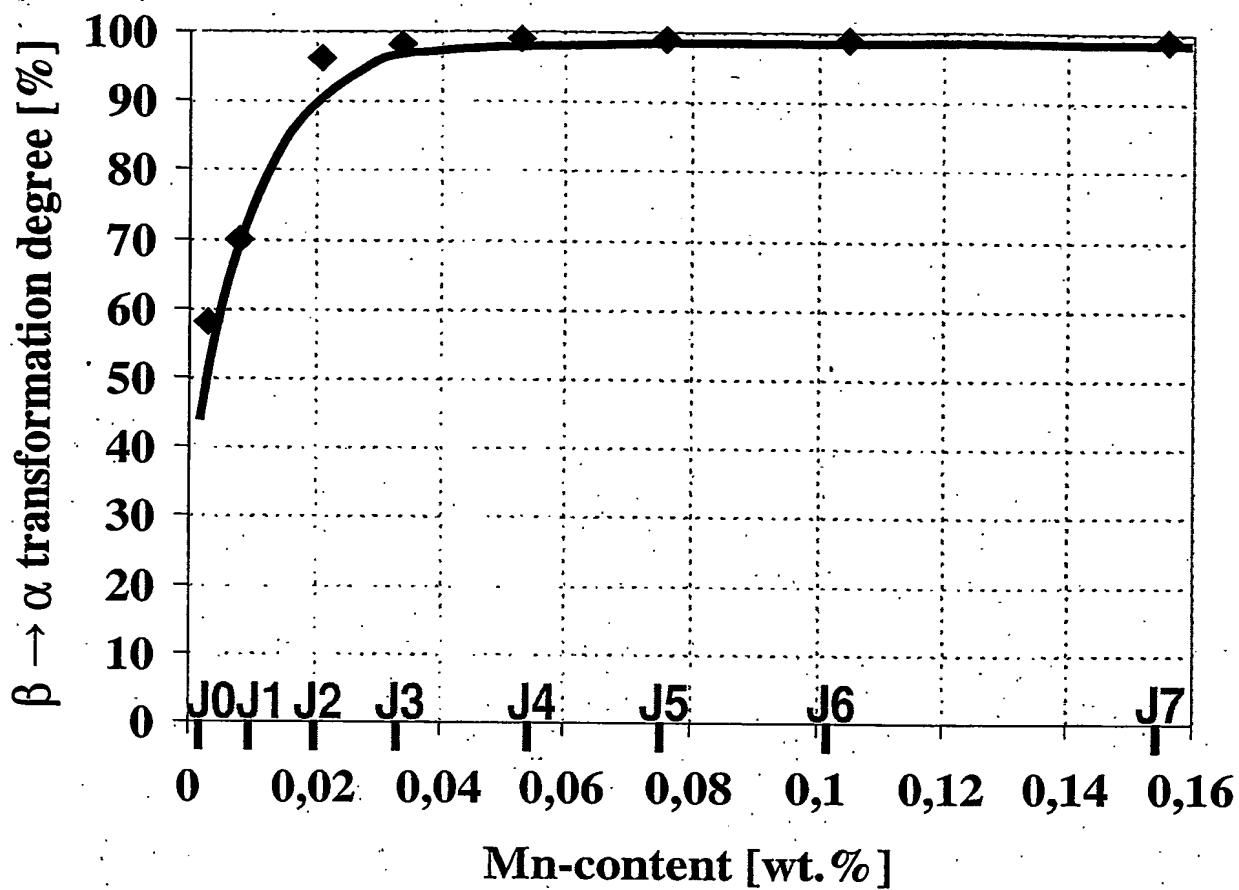



Figure 4: Degree of transformation of β -AlFeSi to α -AlFeSi in alloy variants J0..J7.




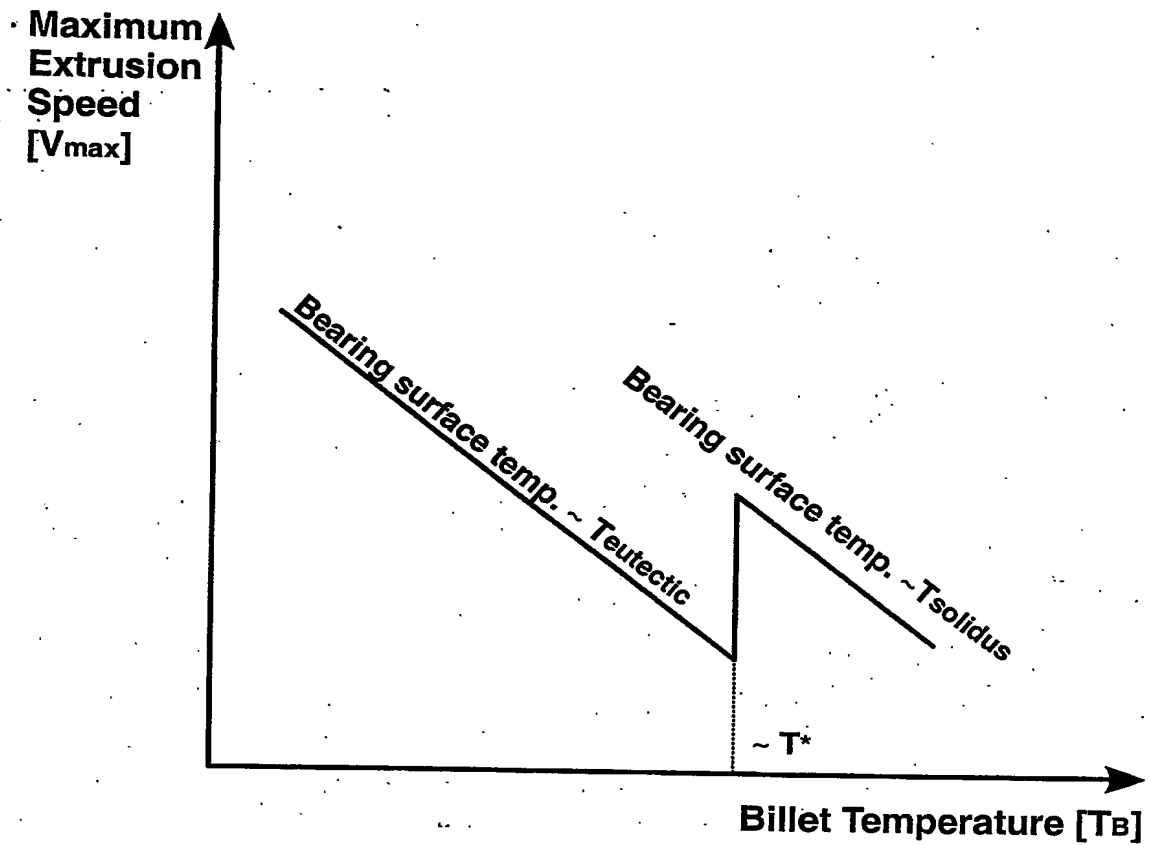


Figure 5. Schematic diagram of max. extrusion speed as a function of billet temperature and tearing mechanism. Billet temperature for the transition of mechanism, T^* , is indicated for a low and a high Mn-level



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☒ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.